



Highest Ideas Products

CCTV SYSTEM

**THE BEST
SECURITY SOLUTION**



HIP

อันดับ 1 เรื่องสินค้าและบริการ

CMT9100S3E

2MP HD IR NETWORK CAMERA



ONVIF



FEATURES



- 2MP, 1/2.8" Sony CMOS sensor
- ARM 9 framework, embedded SOC system
- Maximum resolution of 1080P @ 30fps
- Auto backlight compensation and image flip
- Auto 3D noise reduction, de-interlace, image enhancement, edge enhancement, gamma adjustment
- 3.3mm-12mm HD varifocal lens, ICR dual filter switch
- 30-50 meters effective IR distance
- Support H.264 ,M.JPG Baseline Profile/Main Profile/High Profile encoding type
- Support dual-stream transmission, Vice stream D1@30FPS
- Support IOS/Android/WindowsMobile phone browse & control
- Support electronic amplification and electronic drag
- Support audio
- Dual-core backup
- Support video motion detection (VMD), sensitive areas block
- Automatically obtain IP (DHCP), automatic dialing (PPPOE), automatic port mapping (UPnP), DNS (DDNS)
- Support the NFS protocol, FTP download
- Support POE
- Support SD Card
- IP66 waterproof

MODEL


CMT9100S3E -2 MP-IR30 : 2 Megapixel CMOS, 1080P@30fps
3.3mm-12mm HD varifocal lens, IR LED, IP66

DIMENSION


Unit: mm

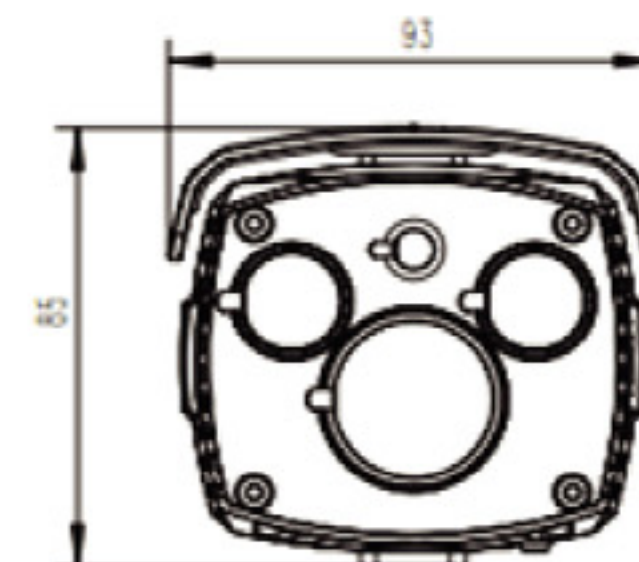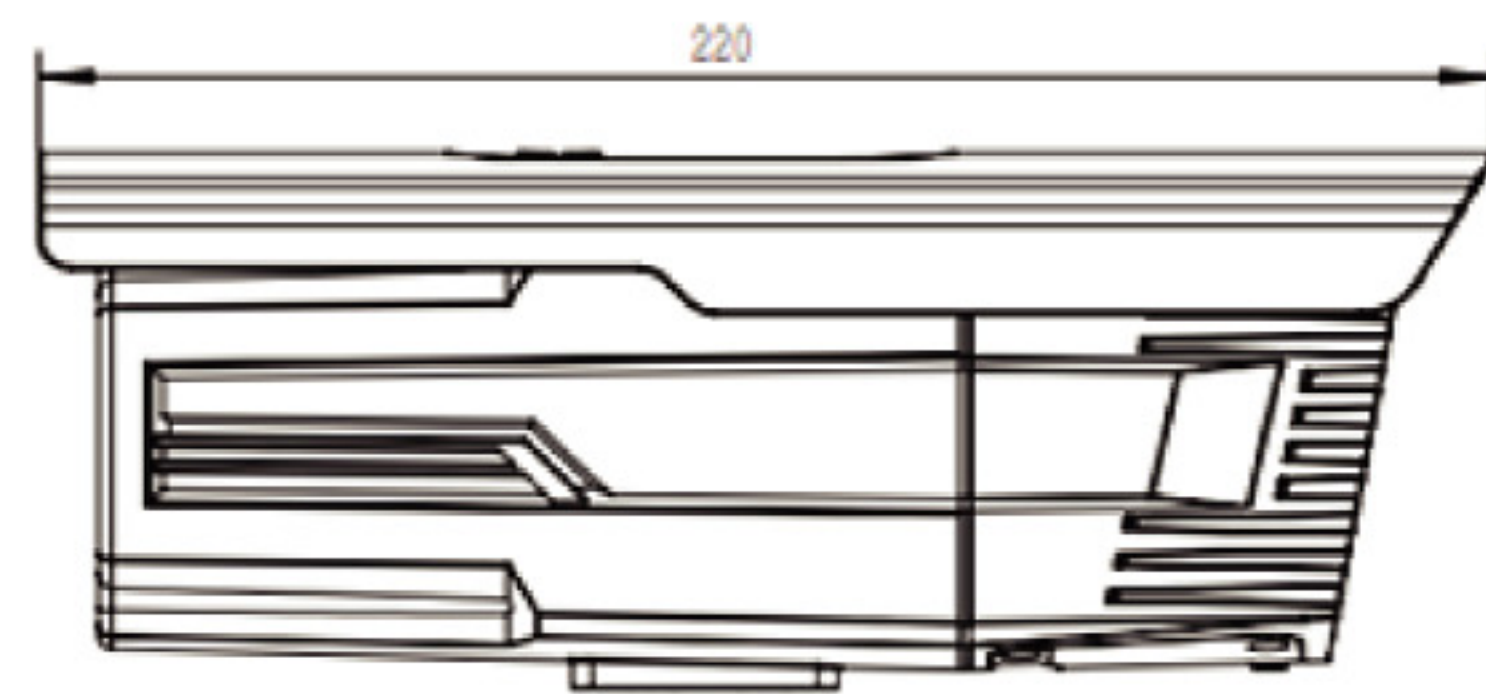

ชัดกว่าเดิม
ดีกว่าเดิม
เร็วกว่าเดิม

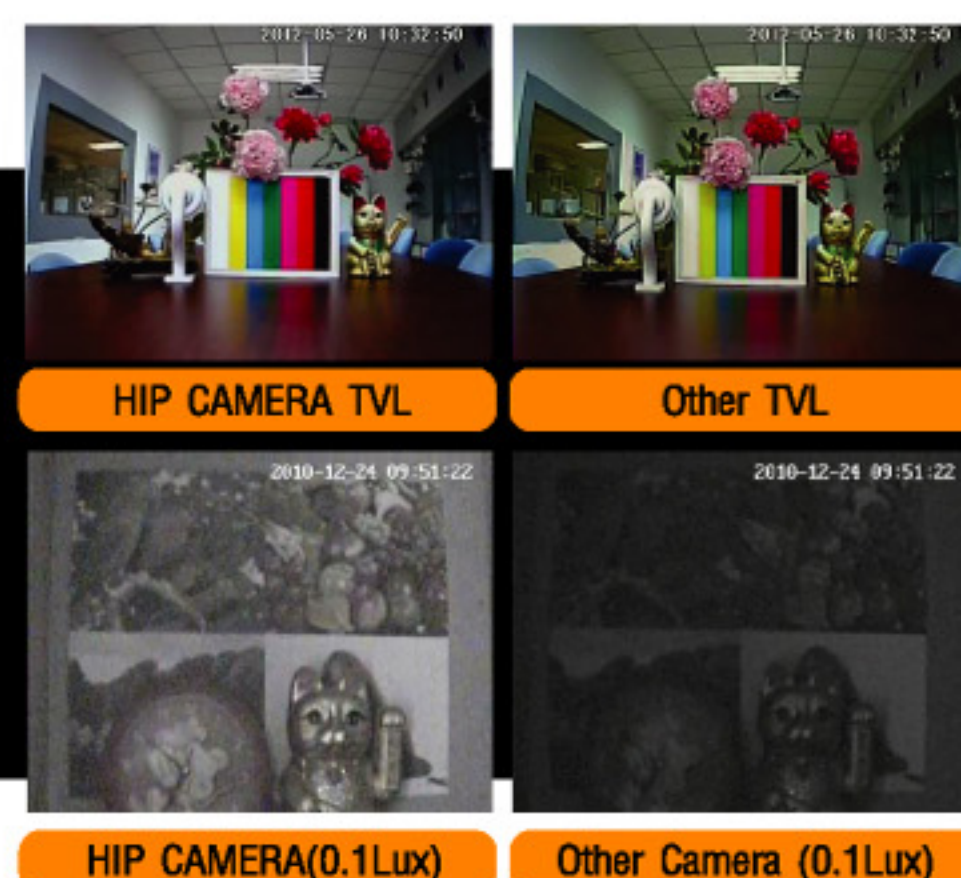


เชื่อมต่อชุดกล้อง IP ง่าย ๆ โดยผ่าน ADSL Modem ดูภาพสดผ่านทาง
SMART PHONE IPHONE, ipad and tablet, และ PC ได้ทันที

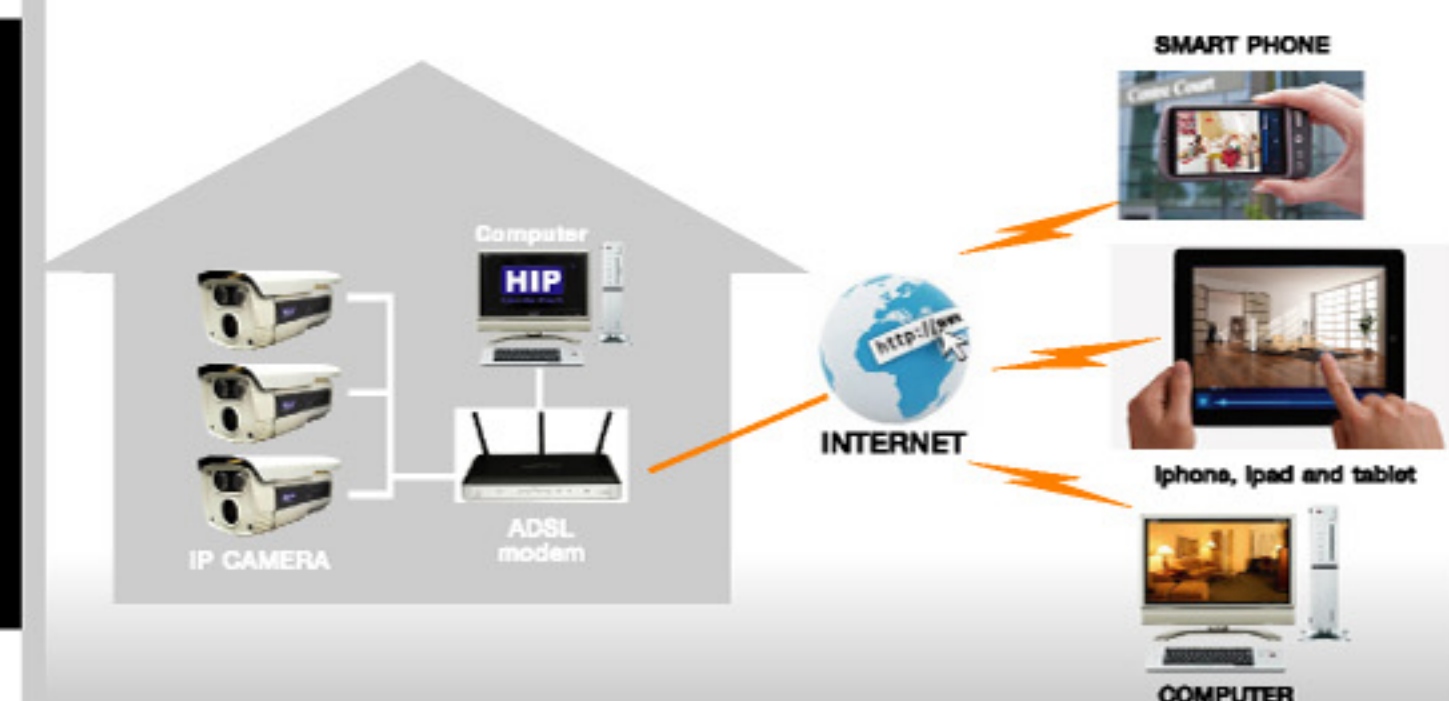

CMT9100S3E

2MP HD IR NETWORK CAMERA

Onvif SPECIFICATIONS

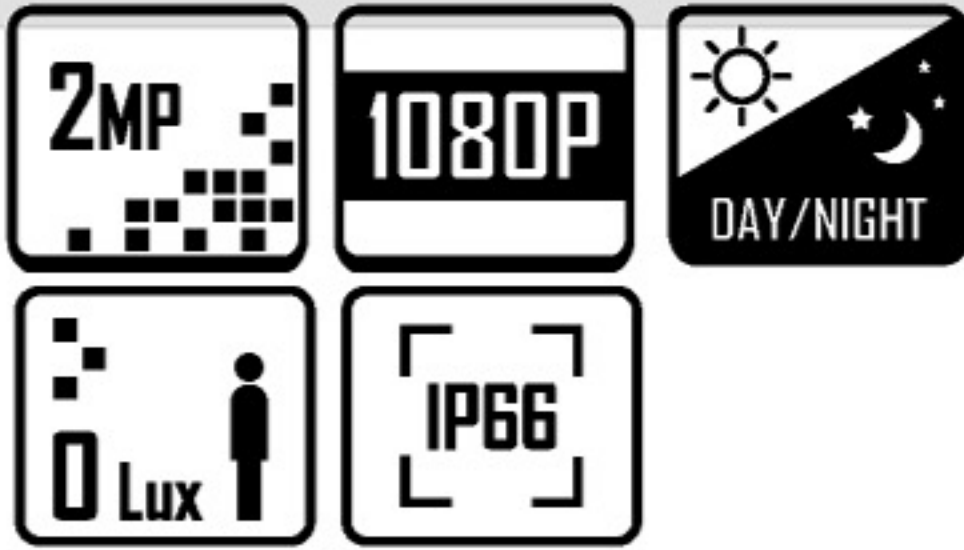

MODEL	
GENERAL	
Operating System	ARM9 Architecture processor
Resource	Simultaneous remote monitoring, local recording and remote control
User Interface	Web, CMS,NVR
CAMERA	
Image sensor	2MP, 1/2.8" Progressive Scan CMOS sensor
Effective Pixels	1920(H)x1080(V)
Electronic Shutter	1/50-1/100,000s
Mini. Illumination	Color: 0.05 Lux @(F1.2, AGC ON) B/W 0.01Lux @(F1.2, AGC ON)
Signal Noise Ratio	>50dB
WDR	Auto
BLC	Auto
Day/Night	ICR
Lens Mount	3.3mm-12mm varifocal lens, 79.3°-27.8°, M12 connector
Image processing	Support 3D noise reduction, de-interlace, image enhancement, edge enhancement, backlight compensation, gamma adjustment
VIDEO&AUDIO	
Video Compression	H.264/M-JPEG
H.264 encoding type	Support H.264 The BaseLine Profile / Main Profile / High Profile encoding type
Image Resolution	1080P(1280x960)/720P(1280x720)/D1(704x576)
Bit Rate	32K~8Mbps
Framerate	960P@30 frames/sec
Audio Compression	G.711/G.726/ADPCM
Audio Bit Rate	8K~48K Bps
NETWORK	
IE access	Built-inWEB SERVER
Network Port	10/100MEthernet interface
Network protocol	TCP/UDP/HTTP/MULTICAST/UPnP/NTP/RTSP/Onvif 2.0
Special	
POE	Support
Support SD Card	32G SD card
ENVIRONMENTAL	
Power Supply	DC 12V±10%
IR LEDS	2pcs Array IR LED, IR distance: 30-50 meters
Ingress Protection	IP66
Operating Environment	-30°C~60°C, 0~95% RHG
Dimension	220mmx93mmx85mm