



Highest Ideas Products

CCTV SYSTEM

THE BEST
SECURITY SOLUTION



HIP
อันดับ 1 เรื่องสินค้าและบริการ

IP CCTV

CMT9413R

IR 30 METERS LEN:3.3MM/6MM/12MM




Onvif

- มีความคมชัดสูง ความละเอียดสูงกว่ากล้องอนาล็อก 700TVL ประมาณ 2 เท่า
- เป็นกล้อง อินฟราเรดอาร์เรย์รุ่นใหม่ประหยัดพลังงานกว่ากล้องอินฟราเรด LED ทั่วไป
- สามารถกำหนดค่าความสามารถต่างๆจากตัวกล้องเองผ่าน IE
- สามารถบันทึกได้โดยใช้ PC base ไม่จำเป็นต้องมี NVR (ใช้ CMS ของกล้อง)
- FREE 1CH function SMART วิเคราะห์ภาพตรวจของหาย ต่อ function นับเลข เตือนกล้องดับและอื่นๆ
- POE PORT





- 1.3MP, 1/3" Progressive Scan CMOS Sensor
- ARM9 framework, embedded SOC system
- Maximum resolution of 960P@30fps
- Support backlight compensation and image flip
- 3.3mm/6mm/12mm/ HD fixed focus lens optional
- 30-50 meters effective IR distance
- Automatically (DHCP) / (PPPOE) / (UPnP) / (DDNS)

เชื่อมต่อชุดกล้อง IP ง่ายๆ โดยผ่าน ADSL Modem ดูภาพสดผ่านทาง SMART PHONE IPHONE, Ipad and tablet, และ PC ได้ทันที



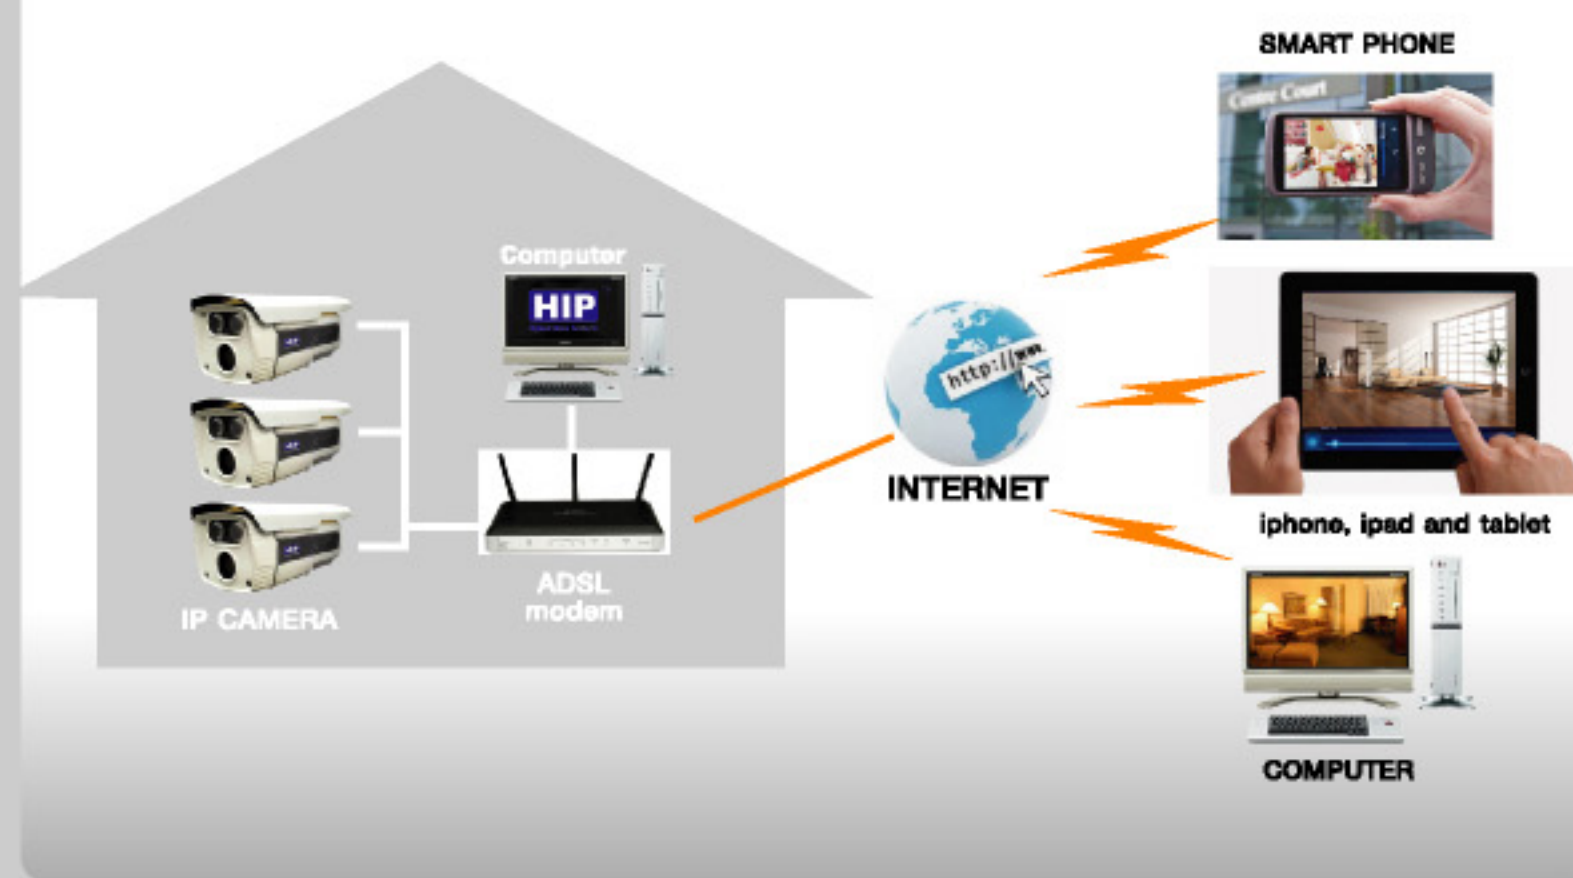


DIMENSION

Unit: mm

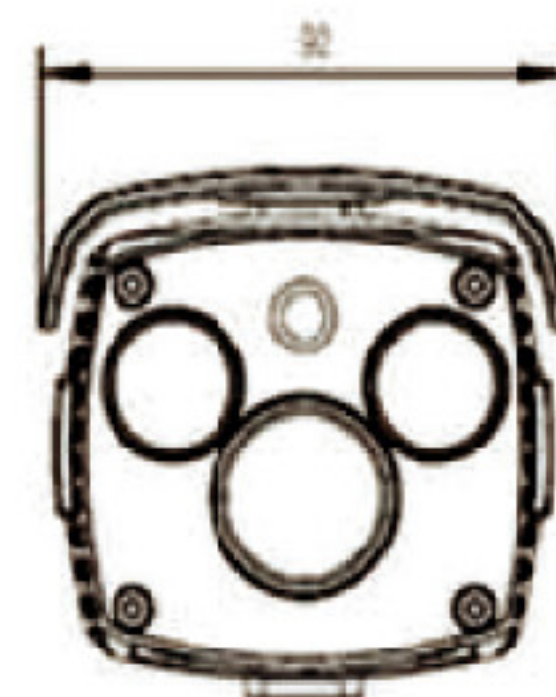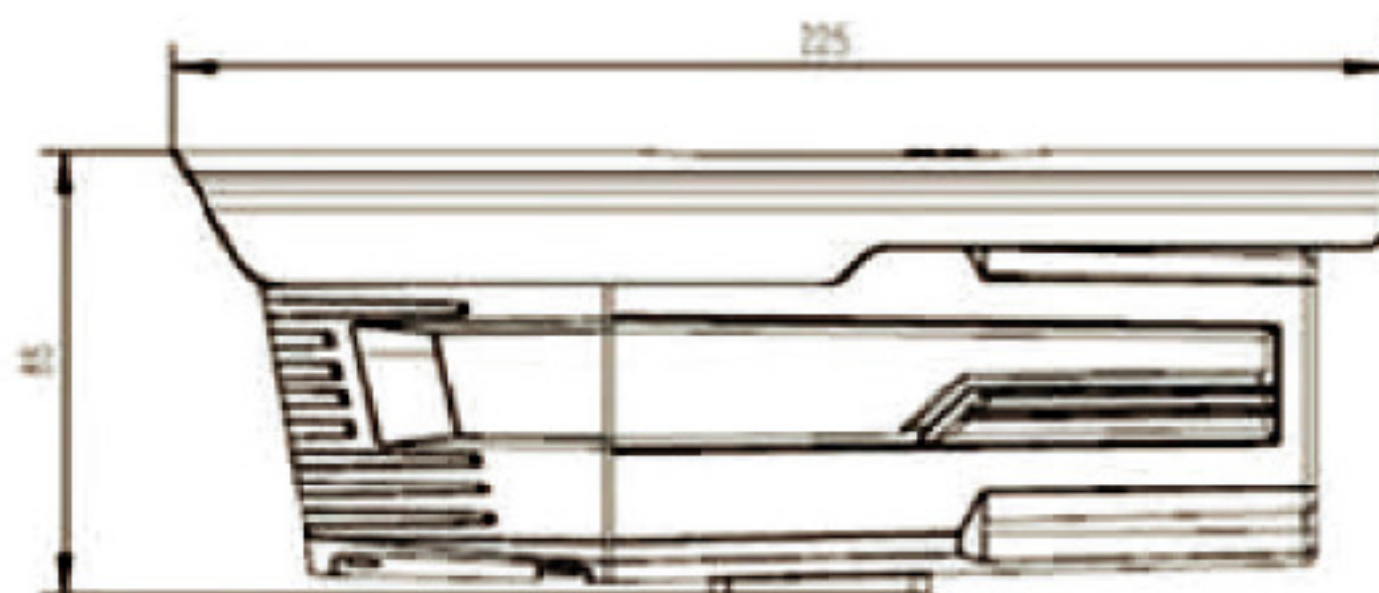

ชัดกว่าเดิม
ดีกว่าเดิม
เร็วกว่าเดิม

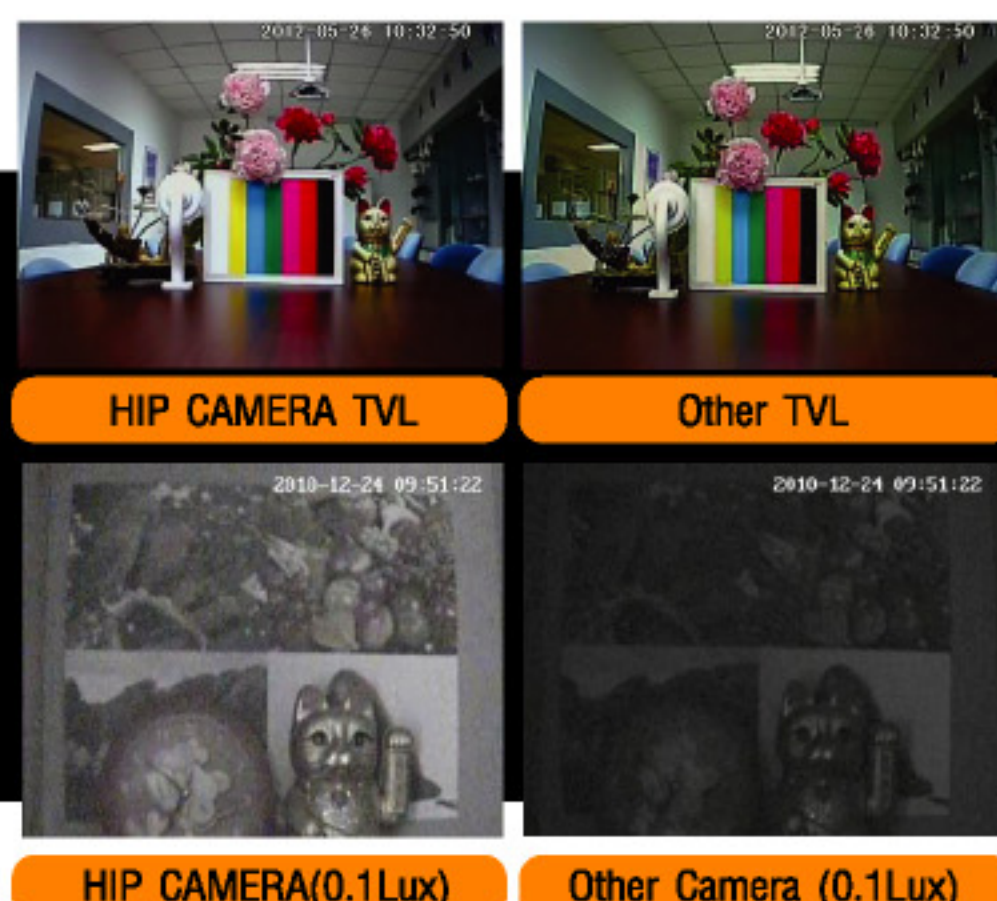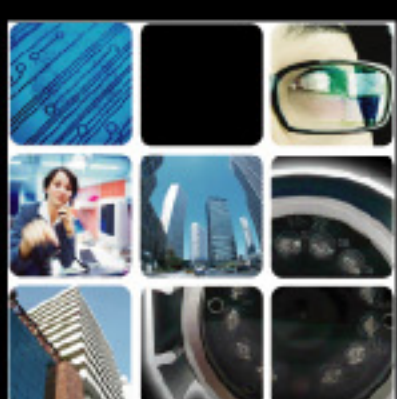




IP CCTV

CMT9413R

IR 30 METERS LEN:3.3MM/6MM/12MM

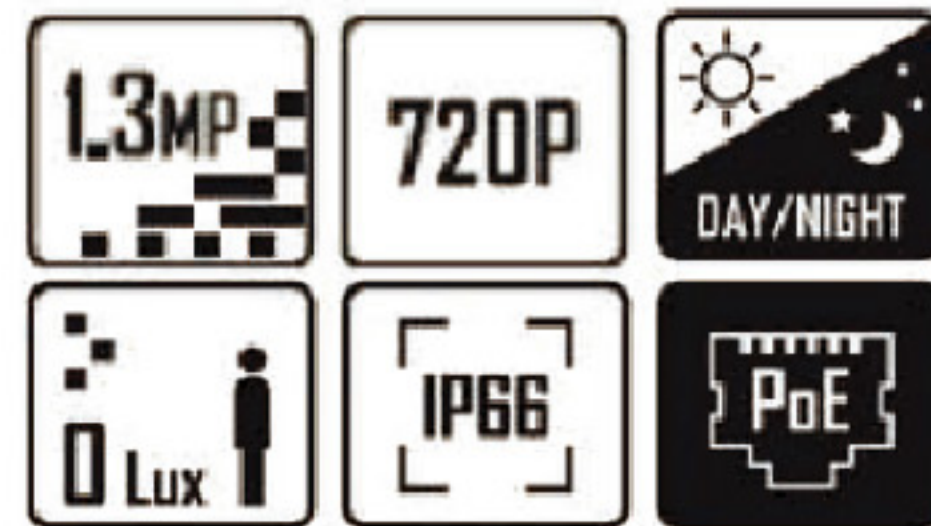

Onvif

SPECIFICATIONS

MODEL	CMT9413R -IR30(3.3mm)-Z	CMT9413R -IR30(6mm)-Z	CMT9413R -IR30(12mm)-Z
GENERAL			
Operating System	ARM9 Architecture processor		
Resource	Simultaneous remote monitoring, local recording and remote control		
User Interface	Web, CMS,NVR		
CAMERA			
Image sensor	1.3MP, 1/3" Progressive Scan CMOS sensor		
Effective Pixels	1280(H)x960(V)		
Electronic Shutter	1/25-1/100,000s		
Mini. Illumination	Color: 0.5 Lux @(F1.2, AGC ON) B/W: 0 Lux @(F1.2, AGC ON)		
Signal Noise Ratio	>50dB		
WDR	AUTO		
BLC	AUTO		
Day/Night	ICR		
Lens Mount	3.3mm fixed focus lens	6mm fixed focus lens	12mm fixed focus lens
Image processing	Support 3D noise reduction, de-interlace, image enhancement, edge enhancement, backlight compensation, gamma adjustment		
VIDEO			
Video Compression	H.264/M-JPEG		
H.264 encoding type	Support H.264 The BaseLine Profile / Main Profile / High Profile encoding type		
Image Resolution	1.3M(1280x960)/720P(1280x720)		
Bit Rate	32K~8Mbps		
Framerate	960P@30 frames/sec		
Video Format	PAL/NTSC		
Videoparameters	Contrast, brightness, saturation can be adjusted independently		
NETWORK			
IE access	Built-inWEB SERVER		
Network Port	10/100MEthernet interface		
Network protocol	TCP/UDP/HTTP/MULTICAST/UPnP/NTP/RTSP/Onvif		
System			
OSD	Support characters overlay, time overlay		
Authority Management	Four class, 128 user system permissions, user name and password custom		
ENVIRONMENTAL			
Power Supply	DC 12V±10%		
IR LEDS	40-60 meters		
Operating Environment	-30°C~60°C, 0~95% RHG		
Dimension	225mmx92mmx85mm		